


Пример расчёта конструкции

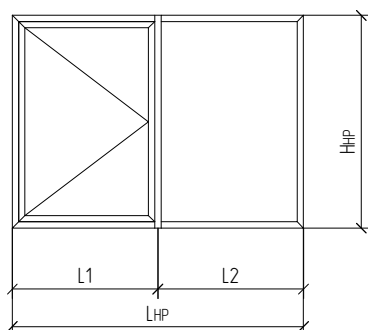


Артикул	Эскиз	1...
Комплекующие изделия		
AYPC.W72.9908		4
AYPC.W77.0902		4
100x62x1(3)		8 (8)
AYPC.W62.0999K		2
AYPC.C48.0919M-01K		2
AYPC.W50.0930		4
AYPC.W62.0953-01		8
AYPC.W62.0953-02		4
AYPC.W62.0912		8
AYPC.W62.0913		4
AYPC.W62.0916-01		4
AYPC.W62.0951K-01		4
AYPC.W62.0957		4
AYPC.W62.0973K-01		4
3,9x13-A2ISO14585		(LHC+LHC)/250+2
5x10DIN6325D		32

Артикул	Эскиз			1...
Профиль				
AYPC.W72.3.0166		45-90	L3=L1-18	1
		90-45	L3=L1-18	1
		90-45	L4=L2-18	1
		45-90	L4=L2-18	1
		45-45	HHP	2
AYPC.W72.3.0269		45-45	LHC=L1-42	2
		45-45	HHC=HHP-60	2
AYPC.W72.3.0340		90-90	HHP	1
AYPC.C48.0611		90-90	LHC-3	1
AYPC.W62.0614		90-90	LHC+17	1
AYPC.C48.0612 (AYPC.W62.0607)		90-90	-	
AYPC.C48.0602		90-90	LBP=L2-54	2
		90-90	HHP=HHP-116	2
AYPC.C48.0604		90-90	LBC=LHC-136	2
		90-90	HPC=HHC-180	2

Артикул	Эскиз		1...
Уплотнители			
FRK98		LHCx2+HHCx2	1
FRK195		LHCx2+HHCx2	1
FRK196			4
FRK193		(LC+HC)x2+(LC1+HC1)x2	1
AYPC.W72.0911		(LC1+HC1)x2-4x100	1
AYPC.W77.0908		(LC+HC)x2-4x100	1
FRK197		(LC+HC)x2+(LC1+HC1)x2	1
FRK179			8
FRK101		LHCx2+HHCx2	1

Заполнение 50 мм	
LC=LHC-154; HC=HHC-154	1
LC1=L2-72; HC1=HHP-90	1



08.02,08.03,08.04