

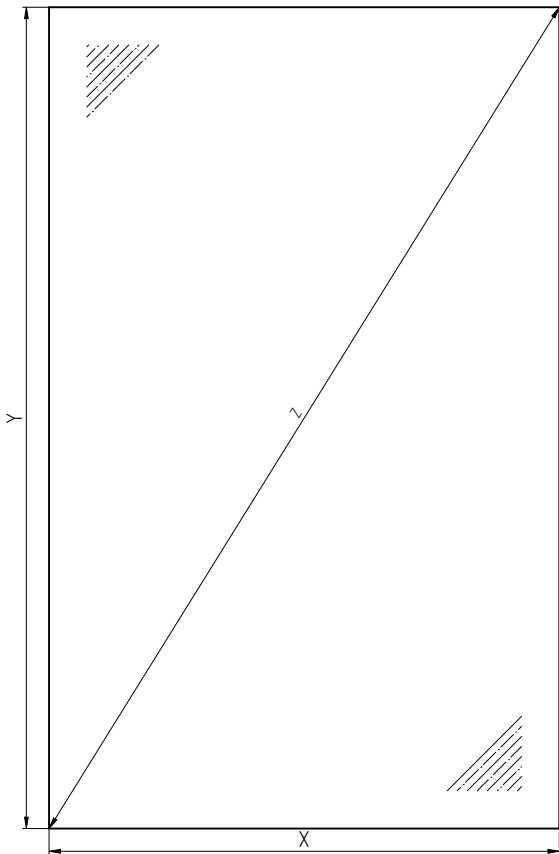



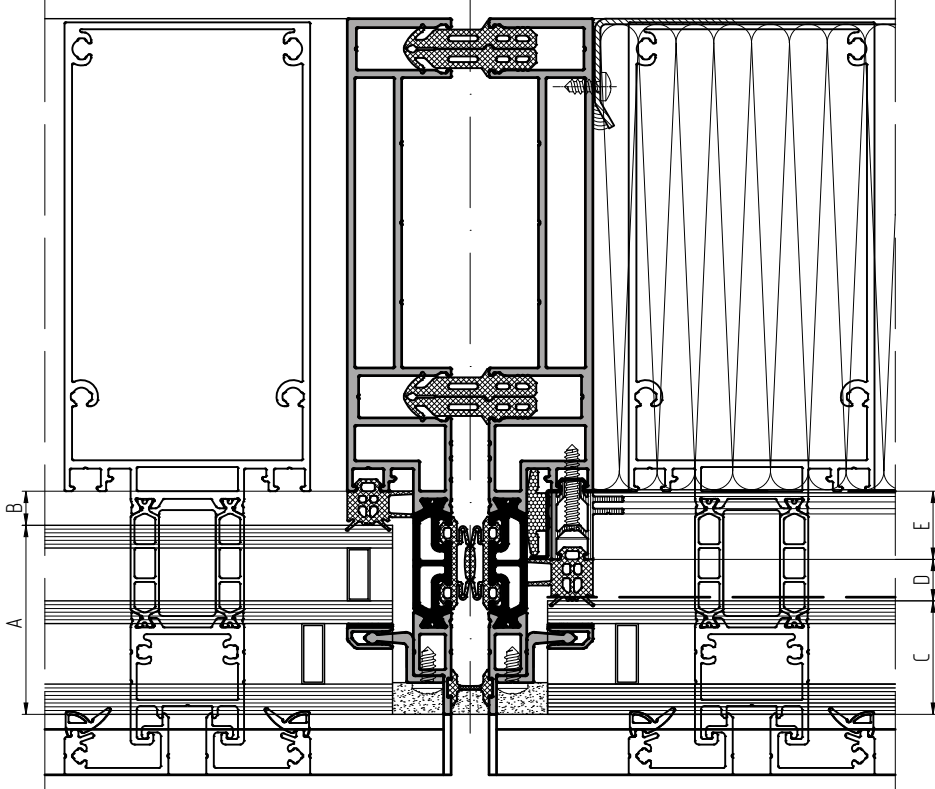

						 min.5			
A	B	Профиль рамы		Профиль импоста	C	D	E		
FRK110 (4mm)	44 mm	FRK80 (15 mm)			26 mm	FRK80 (15 mm)	AYPC.F50.0901	18 mm	3,9x25 A2IS014586
FRK110	46 mm	FRK79 (13 mm)			28 mm	FRK79 (13 mm)			
FRK110	48 mm	FRK78 (11 mm)			30 mm	FRK78 (11 mm)			
FRK110	50 mm	FRK77 (9 mm)			32 mm	FRK77 (9 mm)			
FRK110	52 mm	FRK76 (7 mm)			34 mm	FRK76 (7 mm)			
FRK110	54 mm	FRK75 (5 mm)			24 mm	FRK78 (11 mm)	AYPC.F50.0902	24 mm	3,9x32 A2IS014586
FRK110	56 mm	FRK74 (3 mm)			26 mm	FRK77 (9 mm)			
					28 mm	FRK76 (7 mm)			
					30 mm	FRK75 (5 mm)			

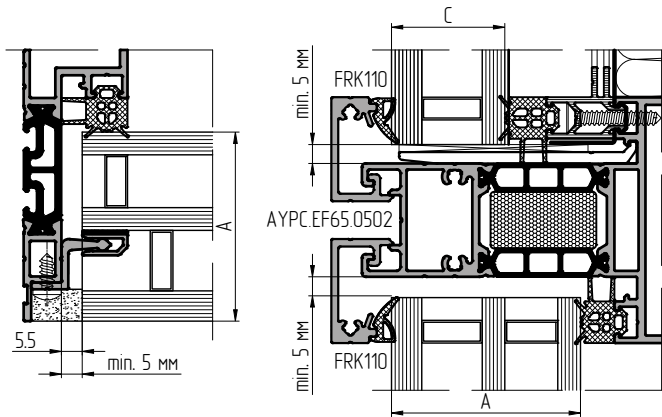

Допуск на размер для заполнения		
X	Ширина	±1 мм
Y	Высота	±1 мм
Z	Диагональ	±2 мм

Допуск на размер для заполнения		
X	Ширина	±1 мм
Y	Высота	±1 мм
Z	Диагональ	±2 мм

1. Для непрозрачных частей фасада должно использоваться эмалированное закаленное стекло. Цвет эмали на внутренней поверхности стекла необходимо подобрать в зависимости от использованных стеклопакетов в прозрачной части фасада.

