


Пример расчёта конструкции

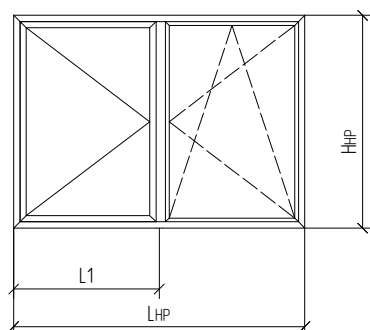


Артикул	Эскиз	1...
Комплектующие изделия		
AYPC.W77.0902		4
100x44x5		6
100x62x1 (2) (3)		4 (6) (10)
AYPC.W62.0999K		3
AYPC.C48.0919M-01K		2
AYPC.W50.0930		4
AYPC.W62.0952		4
AYPC.W62.0952-01		4
AYPC.W62.0952-03		4
AYPC.W62.0952-07		4
AYPC.W62.0953-01		8
AYPC.W62.0953-02		4
AYPC.W62.0912		16
AYPC.W62.0913		4
AYPC.W62.0916-01		2
AYPC.W62.0951K-01		2
AYPC.W62.0957		8
AYPC.W62.0973K-01		2
3,9x13-A2ISO14585		$(L_{HC} \times 2 + L_{HC2}) / 250 + 3$
3,9x25-A2ISO14585		$(L_{BP} + H_{BP}) \times 4 / 450$
AYPC.F50.0932		$(L_{BP} + H_{BP}) \times 4 / 450$
5x10DIN6325D		64
PE21x8		$(L_{BP} + H_{BP}) \times 2$

Заполнение 50 мм	
$L_c = L_{HC} - 154$, $H_c = H_{HC} - 154$	1
$L_{c1} = L_{HC1} - 110$, $H_{c1} = H_{HC1} - 110$	1

Артикул	Эскиз			1...
Профиль				
AYPC.W72.3.0166		45-45	L_{HP}	2
		45-45	H_{HP}	2
AYPC.W72.3.0269		45-45	$L_{HC} = L1 - 99.6$	2
		45-45	$H_{HC} = H_{HP} - 117.6$	2
AYPC.W72.3.0302		90-90	$H1 = H_{HP} - 72$	1
AYPC.W72.3.0820		45-45	$L_{BP} = L1 - 54$	2
		45-45	$H_{BP} = H1$	2
AYPC.W72.3.0221		45-45	$L_{HC1} = L_{HP} - L1 - 42$	2
		45-45	$H_{HC1} = H_{HP} - 60$	2
AYPC.C48.0611		90-90	$L_{HC} - 3$	1
		90-90	$L2 = L_{HP} - L1 - 111$	1
AYPC.W62.0614		90-90	$L_{HC} + 17$	1
AYPC.C48.0612 (AYPC.W62.0607)		90-90	-	
AYPC.C48.0604		90-90	$L_{BC} = L_{HC} - 136$	2
		90-90	$H_{HC} = H_{HC} - 180$	2
		90-90	$L_{BC1} = L_{HC1} - 92$	2
		90-90	$H_{HC1} = H_{HC1} - 136$	2

Артикул	Эскиз		1...
Уплотнители			
FRK98		$(L_{HC} + H_{HC} + L_{HC1} + H_{HC1}) \times 2$	1
FRK195		$(L_{HC} + H_{HC} + L_{HC1} + H_{HC1}) \times 2$	1
FRK196			8
FRK193		$(L_c + H_c) \times 2 + (L_{c1} + H_{c1}) \times 2$	1
AYPC.W72.0911		$(L_{c1} + H_{c1}) \times 2 - 6 \times 100$	1
AYPC.W77.0908		$(L_c + H_c) \times 2 - 4 \times 100$	1
FRK197		$(L_c + H_c) \times 2 + (L_{c1} + H_{c1}) \times 2$	1
FRK179			8
FRK101		$(L_{HC} + H_{HC} + L_{HC1} + H_{HC1}) \times 2$	1



08.02,08.03,08.04