

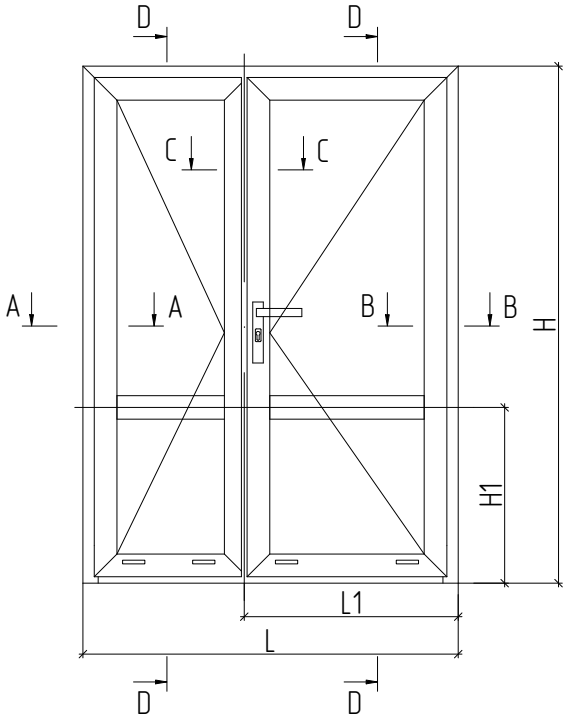

















Пример расчета двупольной двери открыванием внутрь



Артикул	Эскиз			1...
Профиль				
AYPC.W72.0105N			L	1
			H	1
			H	1
AYPC.W72.0205N			L2=L1-41,5	2
			H2=H-67	3
			L3=L-L1-41,5*	2
AYPC.W72.0204N			H2=H-67*	1
AYPC.W72.0302N			L4=L2-134	1
			L5=L3-134	1
AYPC.W72.0801N			L6=L-128	1
AYPC.C48.0618			L7=L2-76	1
			L8=L3-54	1
AYPC.C48.0611			L9=L2-47	1
			L10=L3-25	1
			L11=L4	4
AYPC.W72.0604			L12=L5	4
			H3=H-H1-179	4
			H4=H1-146	4
				


Заполнение огнезащитное	
A=L2-150, B=H-H1-151	1
A=L2-150, B1=H1-118	1
A1=L3-150, B=H-H1-151	1
A1=L3-150, B1=H1-118	1



1. Артикулы профилей штапиков и резиновых уплотнителей выбирать в зависимости от толщины заполнения (см. раздел 03 – Таблица остекления).
2. Для профилей, помеченных *, необходима последующая обработка (см. раздел 05 – Обработка и сборка профилей)

Артикул	Эскиз	1...
Комплектующие изделия		
AYPC.W72.1030		24
100x26x1		16
100x26x3		16
AYPC.C48.0909		4
AYPC.W62.0951K-01		4
AYPC.W62.0973K-01		4
AYPC.W62.0937		20
5x10DIN6325D		40
AYPC.W62.0957		16
AYPC.C48.0919M-01K		8
AYPC.W62.0999		2
AYPC.W62.0912		8
AYPC.W62.0913		8
AYPC.C48.0906		1
AYPC.C48.0907		2
AYPC.W72.9904K		1
AYPC.W72.9906K		1
AYPC.W72.1001		**FS1=(L2x2+L3x2+H2x4+L4x2+L5x2)/400+16
AYPC.W72.1002		FS2=(L+Hx2)/500+2
AYPC.W72.1005		**FS5=(L2x2+L3x2+H2x4+L4x2+L5x2)/400+16
AYPC.W72.1007		4
3,9x16-A2IS014585		FS1x2+FS2x2+16
3,9x16-A2IS014586		FS1x2+FS2x2+12
3,9x13-A2IS014585		L9/250+L10/250
4,2x16-A2IS014585		4
2,9x9,5-A2IS014586		3
3,9x16-A2IS014586		8
3,9x22-A2IS014586		L7/250+L8/250
4,2x25-A2IS014586		24
AYPC.W72.1009K		6
AYPC.W72.1010K		1
AYPC.W72.2001		L4+L5-170
AYPC.W72.2003		L4+L5-170
AYPC.W72.2011		L+Hx2+L2x2+L3x2+H2x4
AYPC.W72.2013		L+Hx2+L2x2+L3x2+H2x4
LTU50x2		Ax4+A1x4+Bx2+B1x2
LTU50x2		Hx2+L+L2x2+L3x2+H2x4

** но не менее 8 шт. на каждый элемент заполнения

Артикул	Эскиз		1...
Уплотнители			
PB048.0750-FP		L7+L8+28x4	1
FRK29-01		(A+A1+B+B1)x4	1
FRK191		(A+A1+B+B1)x4	1
FRK198		(H2+H)x2	1
FRK211		(L2+L3+H2)x2+L	1
FRK170			16
FRK212			2
FRK212-01			2
FRK213			2
FRK233			1
FRK233-01			1