
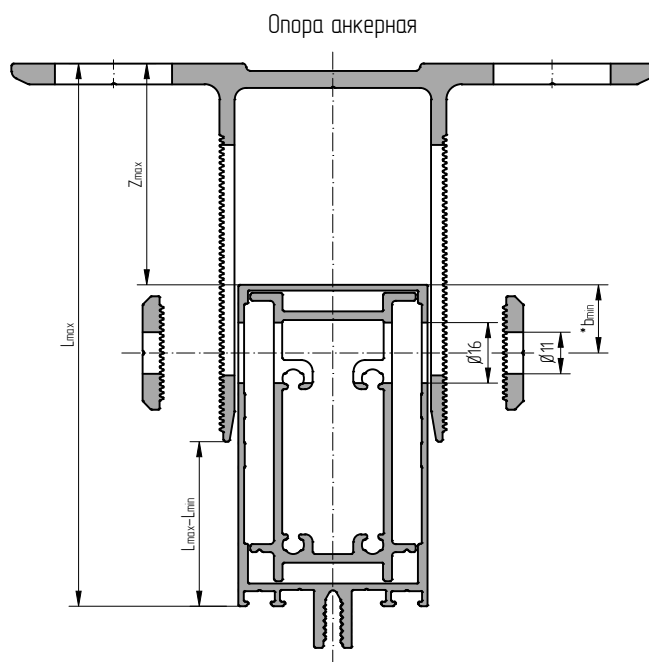
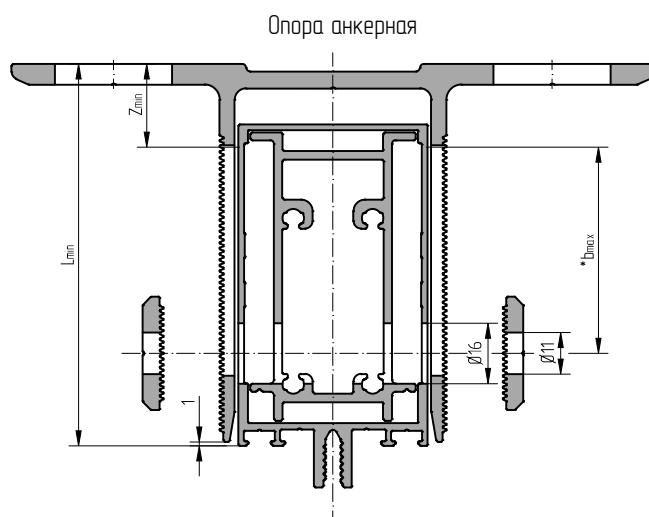


Подбор анкерных кронштейнов для профилей ригелей, используемых в качестве стоек

Артикул Типоразмер		Относ передней грани				Относ задней грани				*b-до оси отверстия, мм	
		L, мм				Z, мм					
АУРС.F50.3205	67	206			26	180	139		26	113	17.5-41.5
		166			26	140	99		26	73	
		126		26		100	59	26		33	
		101	26			75	34	26		8	
АУРС.F50.3206	85	224			44	180	139		44	95	17.5-59.5
		184			44	140	99		44	55	
		144		44		100	59	44		15	
		119	26			93	34	26		8	
АУРС.F50.3207	105	244			64	180	139		64	75	17.5-79.5
		204			64	140	99		64	35	
		164		51		113	59	51		8	
		139	26			75	34	26		8	
АУРС.F50.3208	125	264			84	180	139		84	55	17.5-99.5
		224			84	140	99		84	15	
		184		51		133	59	51		8	
		159	26			93	34	26		8	
АУРС.F50.3209	145	284			104	180	139		104	35	17.5-119.5
		244			104	153	99		104	8	
		204		51	91	180	59	51	91	35	
		179	26			75	34	26		8	
АУРС.F50.3210	160	299			119	180	139		119	20	17.5-134.5
		259			119	168	99		119	8	
		219		51	91	180	59	51	91	20	
		194	26			75	34	26		8	
АУРС.F50.3211	175	314			131	180	139		131	20	17.5-148.5
		274			131	180	99		131	20	
		234		51	91	180	59	51	91	20	
		209	26			75	34	26		8	
АУРС.F50.3212	190	329			131	180	139		131	20	17.5-148.5
		289			131	180	99		131	20	
		249		51	91	180	59	51	91	20	
		224	26			75	34	26		8	
Опора анкерная	АУРС.F50.2901	АУРС.F50.2901-01	АУРС.F50.2901-02	АУРС.F50.2901-03		АУРС.F50.2901	АУРС.F50.2901-01	АУРС.F50.2901-02	АУРС.F50.2901-03	Опора анкерная	
	АлюПРО-F50.2901	АлюПРО-F50.2901-01	АлюПРО-F50.2901-02	АлюПРО-F50.2901-03		АлюПРО-F50.2901	АлюПРО-F50.2901-01	АлюПРО-F50.2901-02	АлюПРО-F50.2901-03		

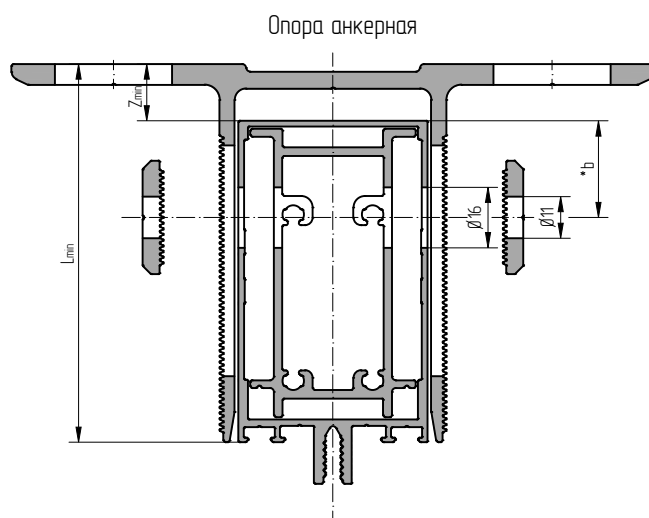

*b - допустимое расстояние от задней плоскости стойки до оси сверления отверстия