


Пример расчета однополюсной двери открыванием внутрь




Артикул	Эскиз	1...
Комплектующие изделия		
AYPC.C48.0909		2
AYPC.W72.9908		12
100x56x1(3)		12 (12)
AYPC.C48.0919M-01K		6
AYPC.W62.0999K		1
AYPC.W62.0937		12
AYPC.W62.0953-01		2
AYPC.W62.0953-02		2
AYPC.W62.0912		6
5x10DIN6325D		32
AYPC.W62.0913		6
AYPC.W62.0957		6
AYPC.W62.0973K-01		4
AYPC.W62.0951K-01		4
AYPC.W62.0916-01		4
AYPC.W72.0986		2
AYPC.W72.9904K		1
AYPC.W72.9906K		1
3,9x13-A2ISO14585		L6/250
3,9x38-A2ISO14585		L8/250
4,2x16-A2ISO14585		4
3,9x16-A2ISO14586		8+6
3,9x22-A2ISO14586		L5/250

Заполнение 50 мм	
A=L-252; B2=H2-120 (A=L-274; B2=H2-131)**	1
A=L-252; B1=H1-H2-153 (A=L-274; B1=H1-H2-164)**	1
A1=L-90; B=H-H1-54	1

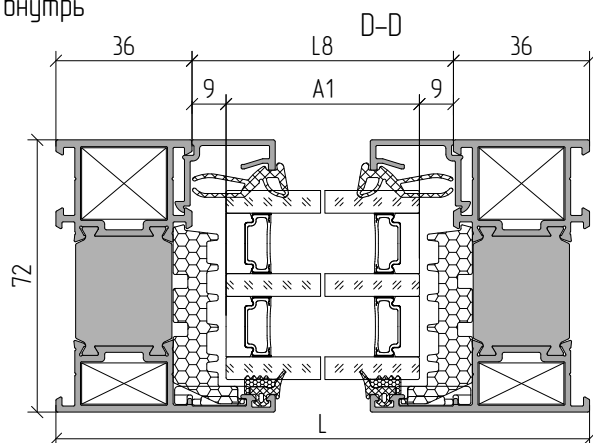

**



03.02, *03.04

Артикул	Эскиз		1...	
Профиль				
AYPC.W72.0105			H1	1
			H1	1
AYPC.W72.0102			L	1
			H4=H-H1	1
			H4=H-H1	1
AYPC.W72.0205 (AYPC.W72.0261)**			H3=H1-67	2
			L2=L-100	2
AYPC.W72.0204 (AYPC.W72.0204)**			* L1=L+44	1
AYPC.W72.0302			L3=L2-134 (L3=L2-156)**	1
AYPC.W72.0801			L4=L-128	1
AYPC.C48.0618			L5=L2-76	1
AYPC.C48.0611			L6=L2-47	1
AYPC.C48.0602			L7=L3	4
			L8=L-72	2
			H5=H-H1-80	2
			H6=H1-H2-179 (H6=H1-H2-190)**	2
			H7=H2-146 (H7=H2-157)**	2
AYPC.W72.9907			L8=L-20	1

Артикул	Эскиз		1...
Уплотнители			
PB048.0750-FP		L5+28x2	1
FRK198		H3x2	1
FRK211		L2x3+H3x2	1
FRK194		(A+B2)x2+(A+B1)x2+ +(A1+B)x2	1
FRK197		(A+B2)x2+(A+B1)x2+ +(A1+B)x2	1
FRK179			12
FRK212			1
FRK212-01			1
FRK213			2
FRK232			1
FRK233			1
AYPC.W72.0911		Ax4+B2x2+B1x2+A1x2+ +Bx2-12x100	1
FRK240		L8x2	1