
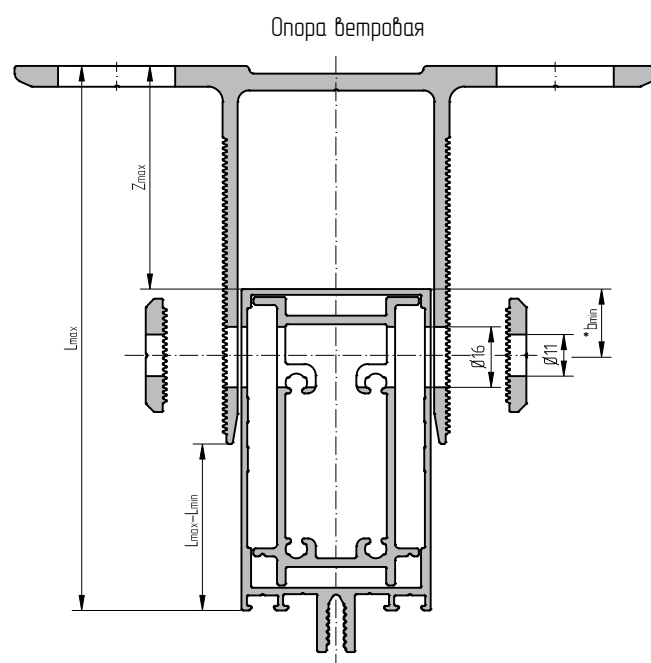


Подбор ветровых кронштейнов для профилей ригелей, используемых в качестве стоек

Артикул Типоразмер		Относ передней грани				Относ задней грани				*b-до оси отверстия, мм		
		L, мм				Z, мм						
AYPC.F50.3205		206				182	139			24	115	17.5-41.5
		166				142	99			24	75	
		126				102	59			24	35	
		101				77	34			24	10	
	67											
AYPC.F50.3206		224				182	139			42	97	17.5-59.5
		184				142	99			42	57	
		144				102	59			42	17	
		119				93	34			26	8	
	85											
AYPC.F50.3207		244				182	139			62	77	17.5-79.5
		204				142	99			62	37	
		164				113	59			62	8	
		139					34			26		
	105											
AYPC.F50.3208		264				182	139			82	57	17.5-99.5
		224				142	99			82	17	
		184				133	59			82	8	
		159					34			26		
	125											
AYPC.F50.3209		284				182	139			102	37	17.5-119.5
		244				153	99			102	8	
		204					59			91		
		179					34			26		
	145											
AYPC.F50.3210		299				182	139			117	22	17.5-134.5
		259				168	99			117	8	
		219					59			91		
		194					34			26		
	160											
AYPC.F50.3211		314				182	139			131		17.5-148.5
		274					99			131		
		234					59			91		
		209					34			26		
	175											
AYPC.F50.3212		329				182	139			131		17.5-148.5
		289					99			131		
		249					59			91		
		224					34			26		
	190											
Опора ветровая		AYPC.F50.2902	AYPC.F50.2902-01	AYPC.F50.2902-02	AYPC.F50.2902-03		AYPC.F50.2902	AYPC.F50.2902-01	AYPC.F50.2902-02	AYPC.F50.2902-03	Опора ветровая	
		АлюПРО-F50.2902	АлюПРО-F50.2902-01	АлюПРО-F50.2902-02	АлюПРО-F50.2902-03		АлюПРО-F50.2902	АлюПРО-F50.2902-01	АлюПРО-F50.2902-02	АлюПРО-F50.2902-03		

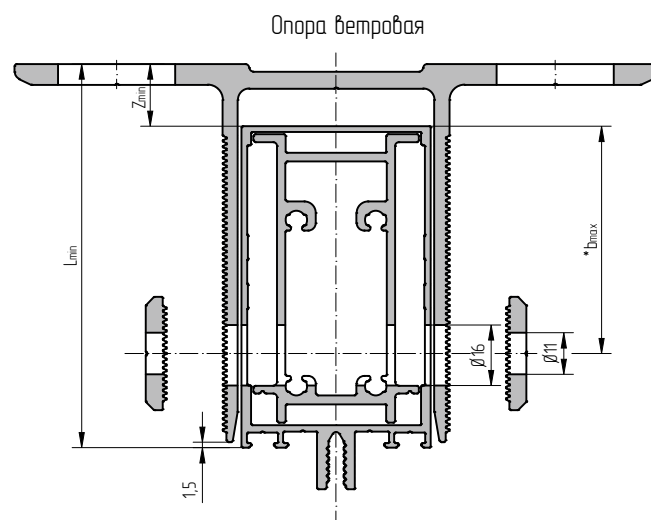

*b - допустимое расстояние от задней плоскости стойки до оси сверления отверстия