



Узловое соединение профилей АУРС.W77.3.0102 с использованием шарнирных накладных АУРС.W62.0962-01, АУРС.W62.0962-02 и штифтов 5x10DIN6325D

α°	X, мм
30	115.0
35	104.5
40	96.5
45	90.2
50	85.1
55	80.9
60	77.3
65	74.3
70	71.6
75	69.3
80	67.2
85	65.3
90	63.5
95	62.0
100	60.5
105	59.2
110	57.9
115	56.7
120	55.6
125	54.5
130	53.5
135	52.5
140	51.6
145	50.6
150	49.7

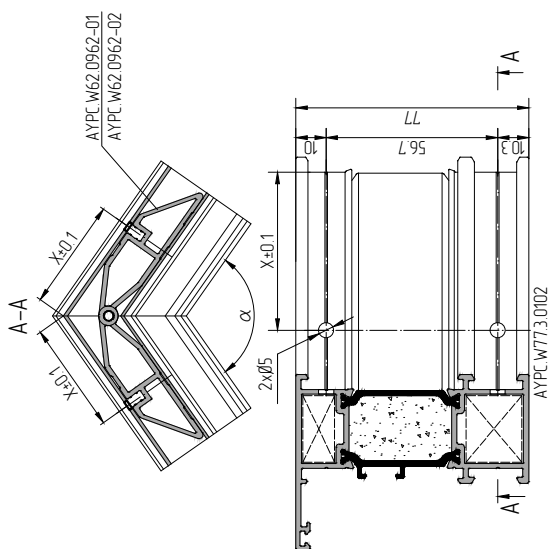


Узловое соединение профилей АУРС.W77.3.0302 с использованием шарнирных накладных АУРС.W62.0962-01, АУРС.W62.0962-02 и штифтов 5x10DIN6325D

α°	X, мм
30	115.0
35	104.5
40	96.5
45	90.2
50	85.1
55	80.9
60	77.3
65	74.3
70	71.6
75	69.3
80	67.2
85	65.3
90	63.5
95	62.0
100	60.5
105	59.2
110	57.9
115	56.7
120	55.6
125	54.5
130	53.5
135	52.5
140	51.6
145	50.6
150	49.7





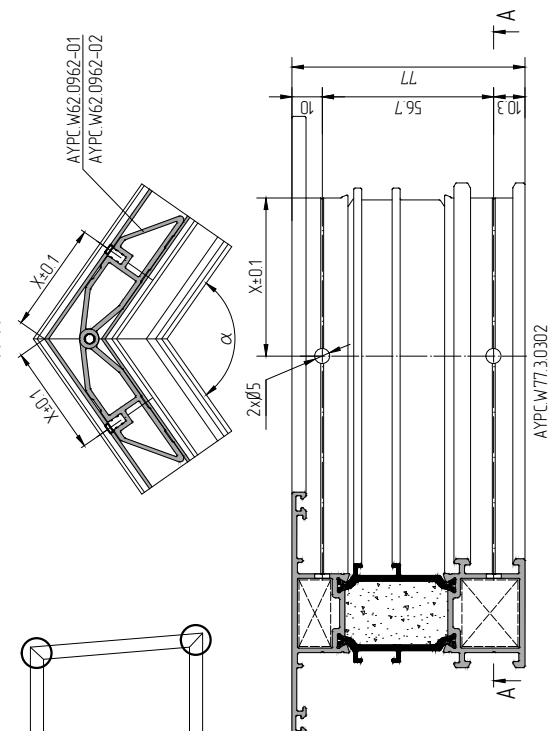


Узловое соединение профилей АУРС.W77.3.0222 с использованием шарнирных накладных АУРС.W62.0962, АУРС.W62.0962-03 и штифтов 5x10DIN6325D

α°	X, мм
30	115.8
35	105.1
40	97.0
45	90.7
50	85.5
55	81.3
60	77.7
65	74.6
70	71.9
75	69.5
80	67.4
85	65.5
90	63.7
95	62.1
100	60.7
105	59.3
110	58.0
115	56.8
120	55.7
125	54.6
130	53.6
135	52.6
140	51.6
145	50.7
150	49.8

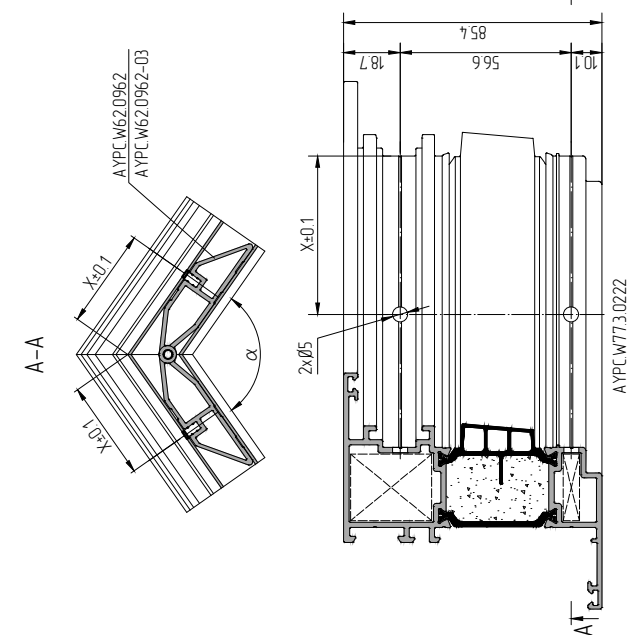

α°	X, мм
80	67.4
85	65.5
90	63.7
95	62.1
100	60.7
105	59.3
110	58.0
115	56.8
120	55.7
125	54.6
130	53.6
135	52.6
140	51.6
145	50.7
150	49.8



При условии, что ширина створки "а" составляет не более половины высоты рамы "b". При условии возможности установки фурнитуры