

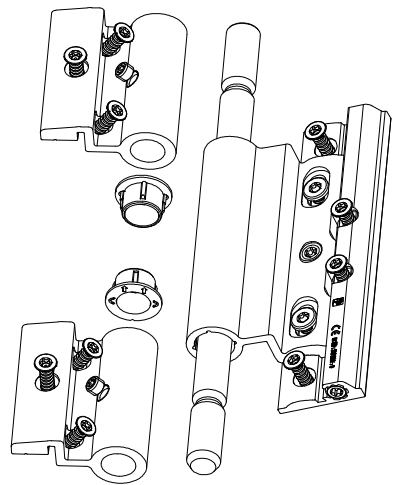


Таблицы подбора количества роликовых петель Dr.Hahn RDRH48 по предельным значениям массы и размеров створки

Петля RDRH48

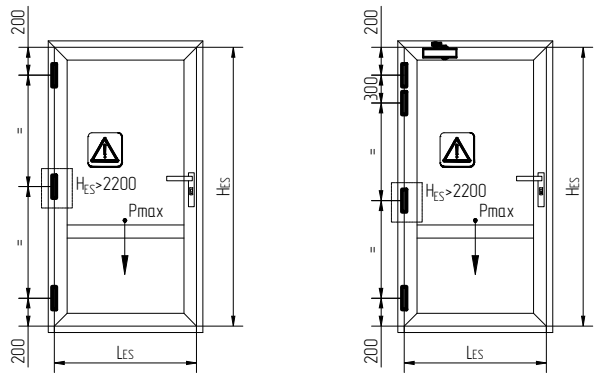


Кондуктор
Т370В0039



При высоте створки более 2200 мм необходимо установить дополнительную петлю согласно схеме.

2500	160	160	160	160	160	160	160
2450	160	160	160	160	160	160	155
2400	160	160	160	160	160	160	150
2350	160	160	160	160	160	160	145
2300	160	160	160	160	160	155	140
2250	160	160	160	160	160	150	140
2200	160	160	160	160	160	145	135
2150	160	160	160	160	155	140	130
2100	160	160	160	160	150	140	125
2050	160	160	160	160	145	135	125
2000	160	160	160	155	140	130	120
1950	160	160	160	155	135	125	115
1900	160	160	160	150	130	125	110
Hs Ls	700	800	900	1000	1100	1200	1250

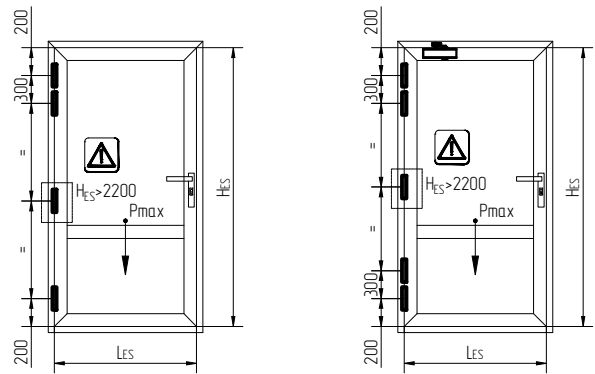

При высоте створки более 2200 мм необходимо установить дополнительную петлю согласно схеме.

2500	200	200	200	200	200	200	200
2450	200	200	200	200	200	200	200
2400	200	200	200	200	200	200	200
2350	200	200	200	200	200	200	200
2300	200	200	200	200	200	200	200
2250	200	200	200	200	200	200	200
2200	180	180	180	180	180	165	150
2150	180	180	180	180	175	160	145
2100	180	180	180	180	170	155	145
2050	180	180	180	180	165	150	140
2000	180	180	180	175	160	145	135
1950	180	180	180	170	155	145	130
1900	180	180	180	165	150	140	125
Hs Ls	700	800	900	1000	1100	1200	1250