


Установка оконных блоков серии ALT W62HS в фасад серии F50, F50SSG, F60																						
Профиль	Т, мм	Толщина заполнения X, мм																				
		28-32 mm			34-38 mm			40-44 mm														
		A, мм	B, мм	C	A, мм	B, мм	C	A, мм	B, мм	C												
AYPE W62.0135	28																					
											FRK19 / FRK16 / FRK229	14,8x60-A2	ISO14586	6	4,8x70-A2	ISO14586	12	4,8x70-A2	ISO14586	18	4,8x80-A2	ISO14586

Профиль вспомогательный А, В				
ALT F50, ALT F50SSG		ALT F60		Винт самонарезающий (≤ 300 мм)
	АУРС F50.0701 (6 мм)		АУРС F50.0701 (6 мм)	3,9x16-A2 ISO14586
	АУРС F50.0735 (12 мм)		АУРС F60.0735 (12 мм)	3,9x19-A2 ISO14586
	АУРС F50.0736 (18 мм)		АУРС F60.0736 (18 мм)	3,9x25-A2 ISO14586
	АУРС F50.0737 (24 мм)		АУРС F60.0737 (24 мм)	3,9x32-A2 ISO14586

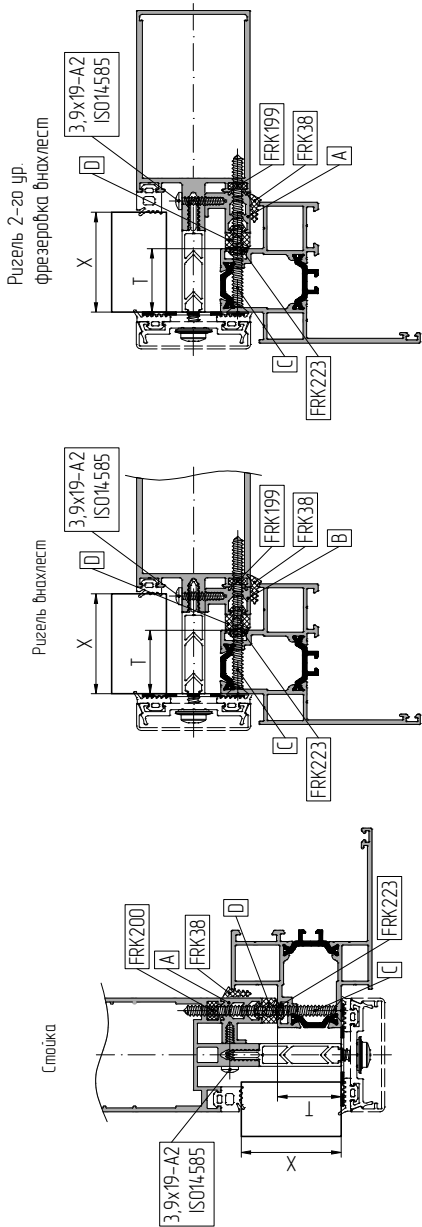

TK F50/F60

03.04.30