
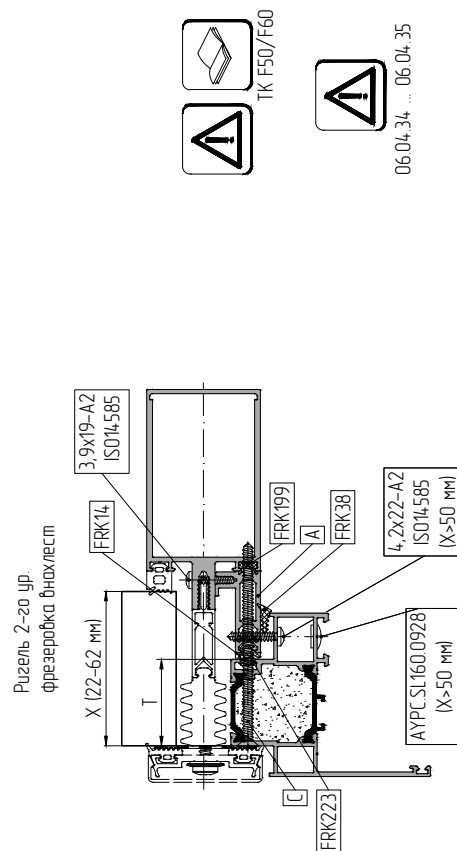


Установка оконных блоков серии ALT W72HS в фасад серии F50, F60

[illegible]

Профиль вспомогательный А, В

Профиль вспомогательный А, В		
ALT F50	ALT F60	Винт самонарезающий (шаг 300 мм)
 АУРС F50.0701 (6 мм)	 АУРС F50.0701 (6 мм)	3,9х16-А2 ISO14.586
 АУРС F50.0702 (12* мм)	 АУРС F50.0702 (12* мм)	3,9х19-А2 ISO14.586
 АУРС F50.0735 (12 мм)	 АУРС F60.0735 (12 мм)	3,9х19-А2 ISO14.586
 АУРС F50.0736 (18 мм)	 АУРС F60.0736 (18 мм)	3,9х25-А2 ISO14.586
 АУРС F50.0737 (24 мм)	 АУРС F60.0737 (24 мм)	3,9х32-А2 ISO14.586
 АУРС F50.0738 (30 мм)	 АУРС F60.0738 (30 мм)	3,9х38-А2 ISO14.586

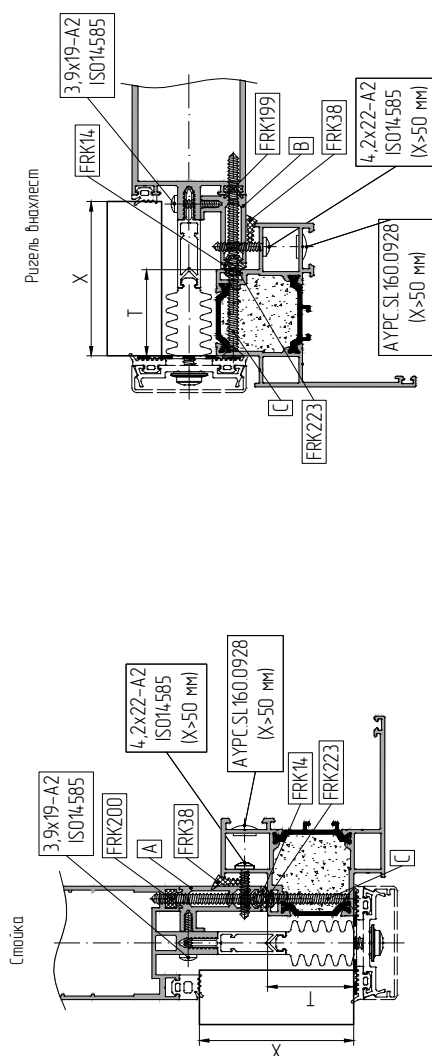

TK F50/F60



06.04.34 ... 06.04.35

Адаптация применения	Применение	
	на стандартном профиле	на H
* 	AYPC F50.0736/0737/ 0738 AYPC F60.0736/0737/ 0738	AYPC AYPC
	AYPC F50.1998 	AYPC F50.1999 