



Таблицы подбора количества роликовых петель Stubline 2006.00 по предельным значениям массы и размеров створки



2700	90	90	90	90	90	90	90	90	90
2600	90	90	90	90	90	90	90	90	90
2500	90	90	90	90	90	90	90	90	90
2400	90	90	90	90	90	90	90	90	80
2300	90	90	90	90	90	90	90	90	74
22200	90	90	90	90	90	90	90	80	71
2100	90	90	90	90	90	90	90	74	65
2000	90	90	90	90	90	90	90	69	62
1900	90	90	90	90	90	90	90	62	58
H _{HC} /H _C	600	700	800	900	1000	1100	1200	1300	

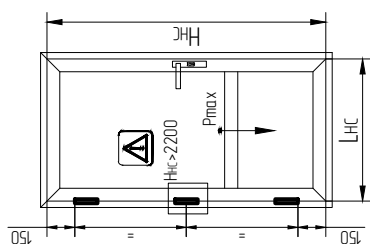


При высоте створки более 2200 мм необходимо установить дополнительную петлю согласно схеме



Stublina 2006.00

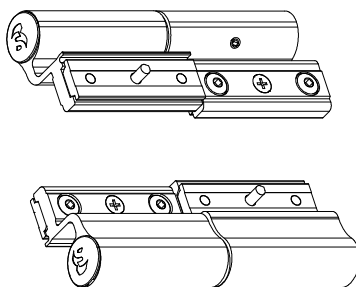


2700	72	72	72	72	72	72	72	72
2600	72	72	72	72	72	72	72	72
2500	72	72	72	72	72	72	72	72
2400	72	72	72	72	72	72	72	64
2300	72	72	72	72	72	72	72	60
2200	72	72	72	72	72	72	72	57
2100	72	72	72	72	72	72	72	52
2000	72	72	72	72	72	72	64	55
1900	72	72	72	72	72	72	57	50
H _{HC}	600	700	800	900	1000	1100	1200	1300
H _C								

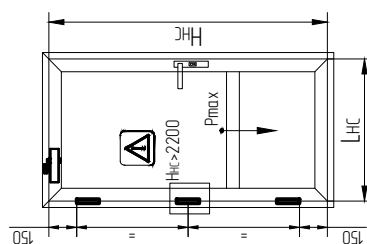

При высоте створки более 2200 мм необходимо установить дополнительную петлю согласно схеме




2700	100	100	100	100	100	100	100	100	100
2600	100	100	100	100	100	100	100	100	100
2500	100	100	100	100	100	100	100	100	100
2400	100	100	100	100	100	100	100	100	88
2300	100	100	100	100	100	100	100	100	81
2200	100	100	100	100	100	100	100	83	78
2100	100	100	100	100	100	100	100	76	71
2000	100	100	100	100	100	100	88	76	68
1900	100	100	100	100	100	100	78	68	64
H _{HC}	600	700	800	900	1000	1100	1200	1300	

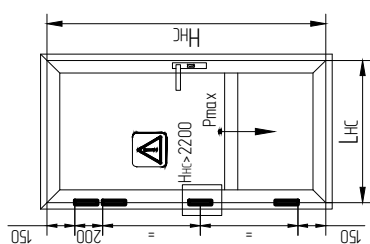

При высоте створки более 2200 мм необходимо установить дополнительную петлю согласно схеме



2700	80	80	80	80	80	80	80	80	80
2600	80	80	80	80	80	80	80	80	80
2500	80	80	80	80	80	80	80	80	80
2400	80	80	80	80	80	80	80	80	70
2300	80	80	80	80	80	80	80	80	65
2200	80	80	80	80	80	80	80	67	62
2100	80	80	80	80	80	80	61	57	
2000	80	80	80	80	80	71	61	55	
1900	80	80	80	80	80	62	54	51	
H _{HC}	600	700	800	900	1000	1100	1200	1300	

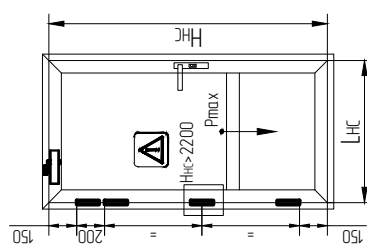

При высоте створки более 2200 мм необходимо установить дополнительную петлю согласно схеме

