




Профиль створки АУРС.СL130.0205
в сборе с усилителем АУРС.СL160.0702, АУРС.СL160.0705

1 : 2




АУРС.СL130.0205 + АУРС.СL160.0702

АУРС.СL130.0205 + АУРС.СL160.0702*

АУРС.СL130.0205 + АУРС.СL160.0705

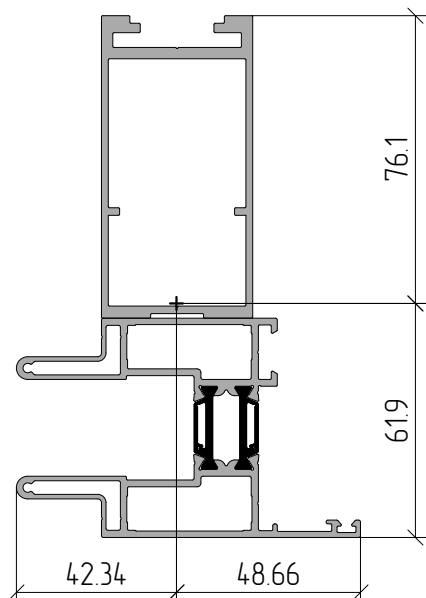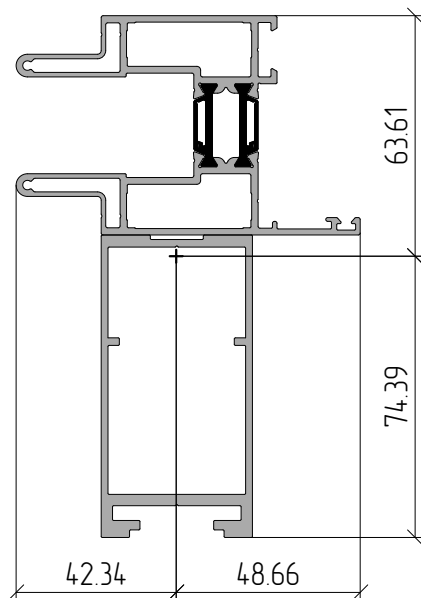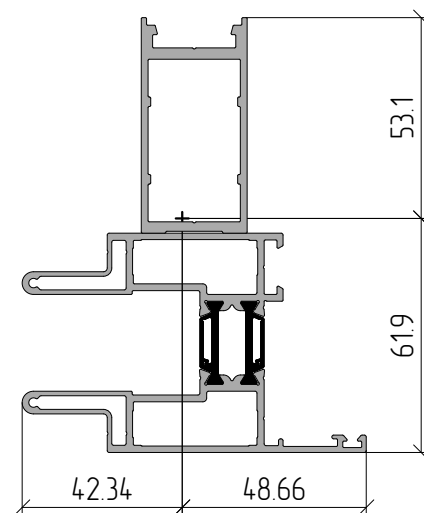АУРС.СL130.0205 + АУРС.СL160.0702 +
АУРС.С43.0706АУРС.СL130.0205 + АУРС.СL160.0702* +
АУРС.С43.0706

АУРС.СL130.0205 + АУРС.СL160.0705*

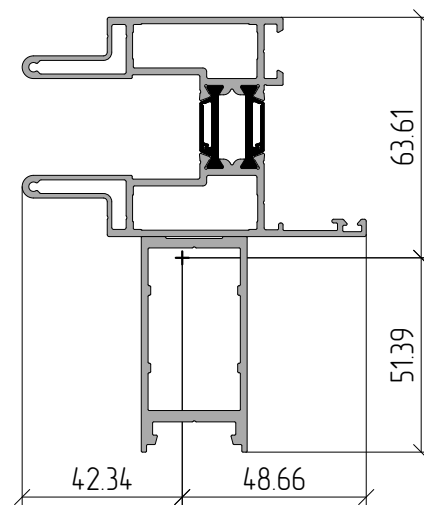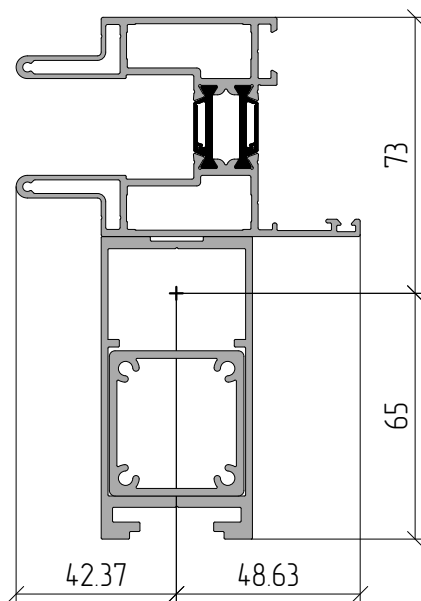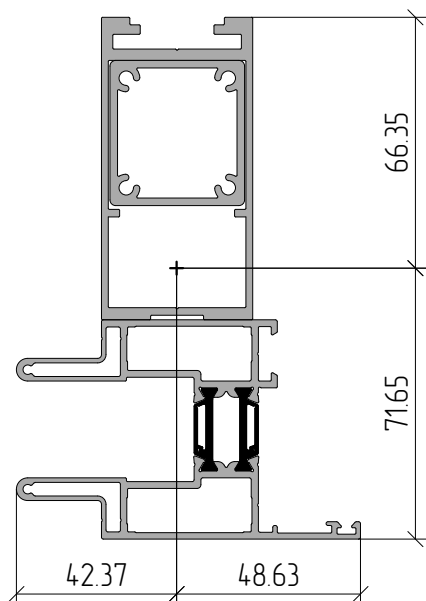

Профиль	m, кг/м.п.	S, мм ²	Jx, см ⁴	Wx, см ³	ay, мм	Jy, см ⁴	Wy, см ³	ax, мм
АУРС.СL130.0205+ АУРС.СL160.0702	3.66	1386.14	187.0	24.57	76.10	46.3	9.52	48.66
АУРС.СL130.0205+ АУРС.СL160.0702*			176.1	23.67	74.39	46.3	9.52	48.66
АУРС.СL130.0205+ АУРС.СL160.0705	3.08	1171.7	94.24	15.22	61.90	36.18	7.44	48.66
АУРС.СL130.0205+ АУРС.СL160.0705*			87.63	13.78	63.61	36.18	7.44	48.66
АУРС.СL130.0205 + АУРС.СL160.0702 + АУРС.С43.0706	4.58	1728.34	234.4	32.71	71.65	52.8	10.86	48.63
АУРС.СL130.0205+ АУРС.СL160.0702* + АУРС.С43.0706			220.4	30.19	73.0	52.8	10.86	48.63