



Профиль створки АУРС.СL130.0301
в сборе с усилителем АУРС.СL160.0702, АУРС.СL160.0705

1 : 2


АУРС.СL130.0301 + АУРС.СL160.0705

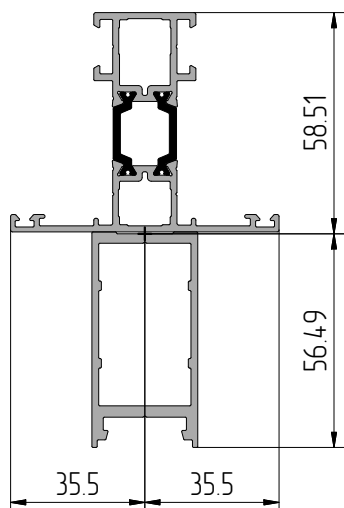


АУРС.СL130.0301 + АУРС.СL160.0705*

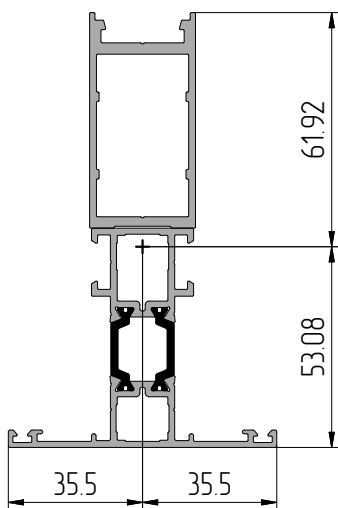


АУРС.СL130.0301 + АУРС.СL160.0705+ АУРС.СL160.0705*

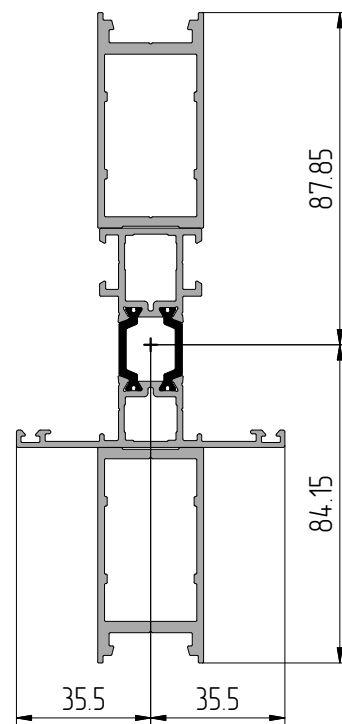

АУРС.СL130.0301 + АУРС.СL160.0702

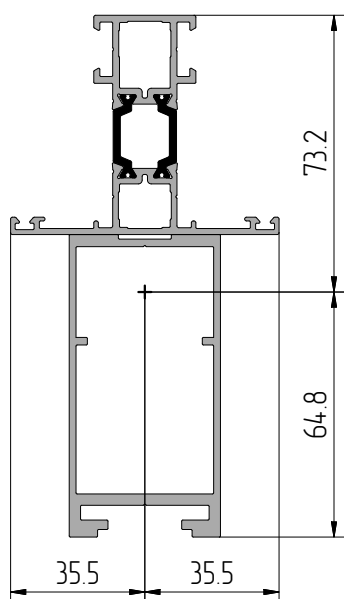

АУРС.СL130.0301 + АУРС.СL160.0702 + АУРС.СL43.0706

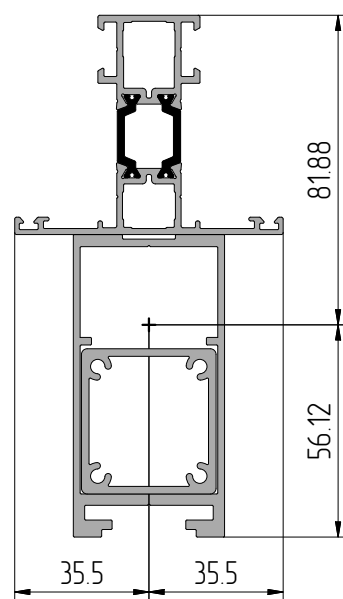

Профиль	м, кг/м.п.	S, мм ²	Jx, см ⁴	Wx, см ³	ay, мм	Jy, см ⁴	Wy, см ³	ax, мм
АУРС.СL130.0301+ АУРС.СL160.0705	2.28	791.82	65.8	11.25	58.51	12.9	3.63	35.5
АУРС.СL130.0301+ АУРС.СL160.0705*			83.1	13.42	61.92	12.9	3.63	35.5
АУРС.СL130.0301+ АУРС.СL160.0705+ АУРС.СL160.0705	3.27	1160.55	219.3	24.96	87.85	17.5	4.93	35.5
АУРС.СL130.0301+ АУРС.СL160.0702	2.86	1006.14	135.5	18.51	73.20	23.4	6.59	35.5
АУРС.СL130.0301 + АУРС.СL160.0702 + АУРС.СL43.0706	2.86	1006.14	163.5	19.97	81.88	29.9	8.42	35.5