


Установка конструкций ALT SL160 в фасад серии F50HL, F50VL															
Профиль	Т, мм	Толщина заполнения Х, мм													
		32 мм			34–38 мм			40–44 мм			50 мм			52–56 мм	
		А, мм	В, мм	С	А, мм	В, мм	С	А, мм	В, мм	С	А, мм	В, мм	С	А, мм	В, мм
															
АУРС SL160 0501	30	FRK18	FRK15	4,8x60-A2 ISO14586	12	6	4,8x70-A2 ISO14586	18	12	4,8x70-A2 ISO14586	24	18	4,8x80-A2 ISO14586	30	24
															
				С			С			С			С		С
				(шаг 450 мм)			(шаг 450 мм)			(шаг 450 мм)			(шаг 450 мм)		(шаг 450 мм)



Профиль вспомогательный А, В		Винт самонарезающий (шаг 300 мм)	Винт самонарезающий (шаг 300 мм)
ALT F50HL, ALT F50VL		АУРС F50 0701 (6 мм)	3,9х16-А2 ISO14586
		АУРС F50 0735 (12 мм)	3,9х19-А2 ISO14586
		АУРС F50 0736 (18 мм)	3,9х25-А2 ISO14586
		АУРС F50 0737 (24 мм)	3,9х32-А2 ISO14586
		АУРС F50 0738 (30 мм)	3,9х38-А2 ISO14586

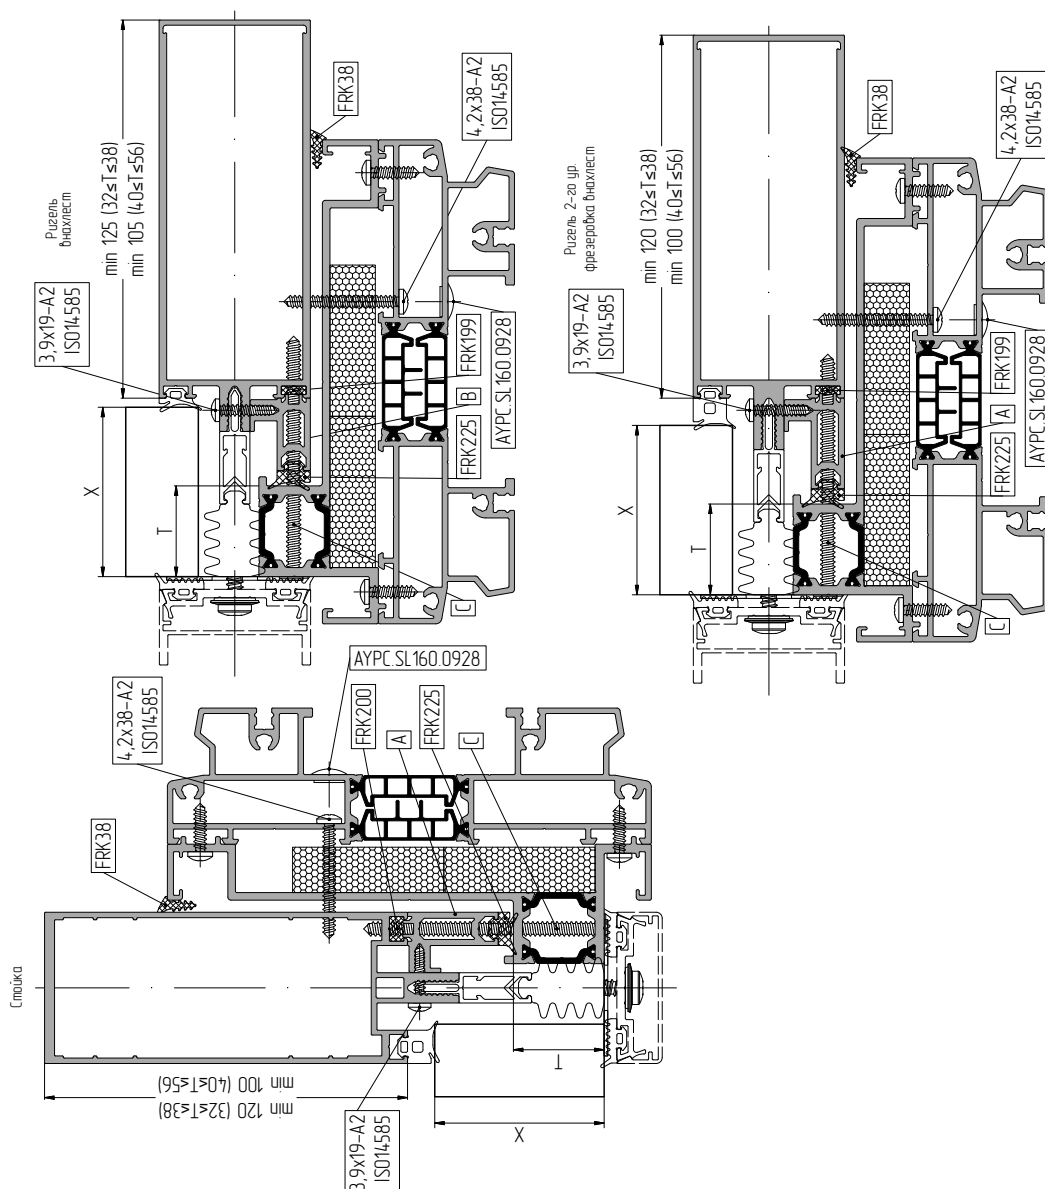