
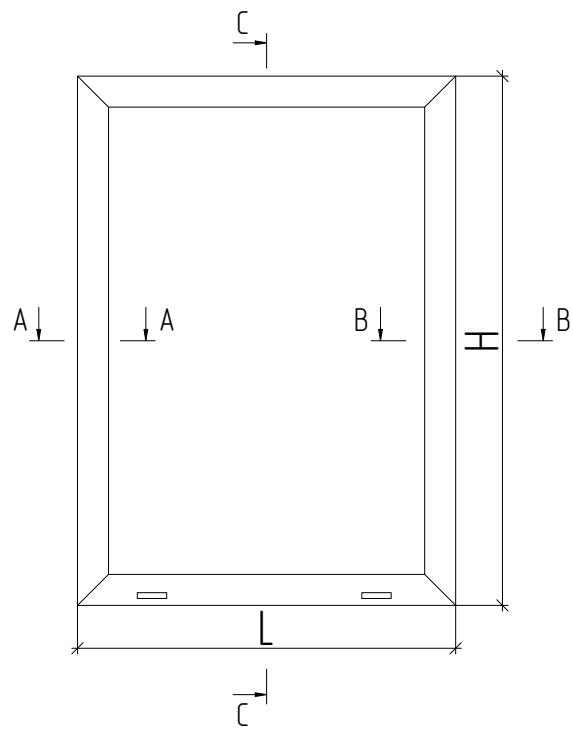






Пример расчета глухого окна



Артикул	Эскиз			1...
Профиль				
AYPC.W72.0102N			L	2
			H	2
AYPC.W72.0604			L1=L-72	2
			H1=H-116	2

Артикул	Эскиз		1...
Уплотнители			
FRK29-01		Ax2+Bx2	1
FRK191		Ax2+Bx2	1
FRK170			4

Артикул	Эскиз	1...
Комплектующие изделия		
AYPC.W72.1030		6
100x26x1		4
100x26x3		4
AYPC.W62.0953-01		4
AYPC.W62.0953-02		4
5x10DIN6325D		16
AYPC.W62.0912		4
AYPC.C48.0919M-01K		2
AYPC.W72.1001		*FS1=(Lx2+Hx2)/400+4
AYPC.W72.1002		FS2=(Lx2+Hx2)/500+4
AYPC.W72.1005		*FS5=(Lx2+Hx2)/400+4
3,9x16-A2ISO14585		FS1x4+FS2x4+16
4,2x25-A2ISO14586		6
AYPC.W72.2001		Lx2+Hx2
AYPC.W72.2002		Lx2+Hx2
AYPC.W72.2003		Lx2+Hx2
LTU10x2		Ax2+Bx2
LTU50x2		Ax2+Bx2

* не менее 8 шт. на каждый элемент заполнения

Заполнение огнестойкое	
A=L-88, B=H-88	1



Артикулы профилей штапиков и резиновых уплотнителей выбирать в зависимости от толщины заполнения (см. раздел 03 – Таблица остекления)