


Пример расчета двустворчатой двери открыванием внутрь

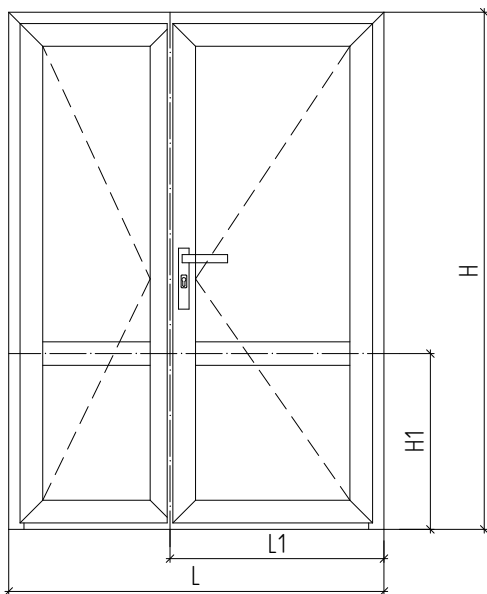

Артикул	Эскиз	1...
Комплекующие изделия		
AYPC.C48.0909		4
AYPC.W62.0917		16
100x50x13		16 (16)
AYPC.C48.0919M-01K		8
AYPC.W62.0999K		2
AYPC.W62.0937		20
AYPC.W62.0912		8
5x10DIN6325D		40
AYPC.W62.0913		8
AYPC.W62.0957		8
AYPC.W62.0973K-01		4
AYPC.W62.0951K-01		4
AYPC.W62.0916-01		4
AYPC.W72.0986		2
AYPC.W62.9904K		1
AYPC.W62.9906K		1
AYPC.C48.0906		1
AYPC.C48.0907		2
2,9x9,5-A2IS014586		3
3,9x13-A2IS014585		(L9+L10)/250
3,9x38-A2IS014585		L13/250
4,2x16-A2IS014585		4
3,9x16-A2IS014586		8+6
3,9x22-A2IS014586		(L7+L8)/250

Артикул	Эскиз		1...	
Профиль				
AYPC.W62.0105			L	1
			H	1
			H	1
AYPC.W62.0205			L2=L1-415	2
			H2=H-59	3
			* L3=L-L1-415	2
AYPC.W62.0204			* H2=H-59	1
AYPC.W62.0302			L4=L2-134	1
			L5=L3-134	1
AYPC.W62.0854			L6=L-128	1
AYPC.C48.0618			L7=L2-76	1
			L8=L3-54	1
AYPC.C48.0611			L9=L2-47	1
			L10=L3-25	1
AYPC.C48.0602			L11=L4	4
			L12=L5	4
			H3=H-H1-179	4
			H4=H1-138	4
AYPC.W62.9907			L13=L-20	1

Артикул	Эскиз		1...	
Уплотнители				
PB048.0750-FP			L7+L8+28x4	1
FRK198			(H2+H)x2	1
FRK211			(L2+L3+H2)x2+L	1
FRK194			(A+A1+B+B1)x4	1
FRK29-01			(A+A1+B+B1)x4	1
FRK170				16
FRK212				2
FRK212-01				2
FRK213				2
FRK233				1
FRK233-01				1

Заполнение 40 мм		1...
A=L2-150, B=H-H1-151		1
A=L2-150, B1=H1-110		1
A1=L3-150, B=H-H1-151		1
A1=L3-150, B1=H1-110		1



03.02,*03.04