


Пример расчета однопольной двери с цоколем открыванием наружу

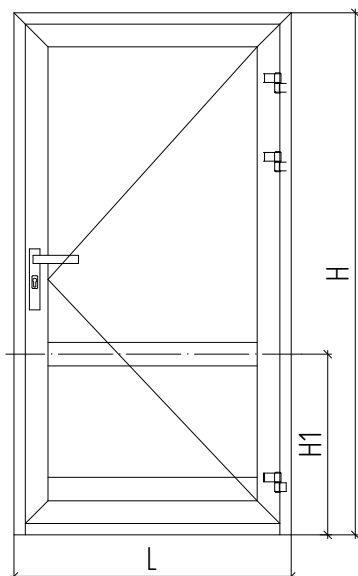


Артикул	Эскиз	1...
Комплекующие изделия		
AYPC.W72.9908		8
100x56x1(3)		8 (8)
AYPC.C48.0919M-01K		4
AYPC.W62.0999K		1
AYPC.W62.0937		12
AYPC.W62.0912		4
5x10DIN6325D		24
AYPC.W62.0913		4
AYPC.W62.0957		6
AYPC.W62.0973K-01		2
AYPC.W62.0951K-01		2
AYPC.W62.0916-01		2
AYPC.W62.0914		1
AYPC.W72.0986		2
AYPC.W72.0947		1
AYPC.W72.0948		1
3,9x13-A2IS014585		L4/250
3,9x16-A2IS014585		4+L3/250
3,9x38-A2IS014585		(L3+L7)/250
3,9x16-A2IS014586		4+6

Артикул	Эскиз			1...
Профиль				
AYPC.W72.0104			L	1
			H	1
			H	1
AYPC.W72.0204 (AYPC.W72.0260)**			L1=L-100	1
			H2=H-57	2
AYPC.W72.0241 (AYPC.W72.0262)**			* L1=L-100	1
AYPC.W72.0302			L2=L1-134 (L2=L1-156)**	1
AYPC.W72.0839			L3=L2 (L3=L2)**	1
AYPC.W72.0838			L4=L-138	1
AYPC.C48.0611			L5=L1-3	1
AYPC.C48.0602			L6=L2	4
			H3=H-H1-179 (H3=H-H1-190)**	2
			H4=H1-189 (H4=H1-200)**	2
AYPC.W72.9907			L7=L-20	1

Артикул	Эскиз		1...
Уплотнители			
FRK198		H2x2	1
FRK211		L1x4+H2x2	1
FRK194		(A+B)x2+(A+B1)x2	1
FRK197		(A+B)x2+(A+B1)x2	1
FRK179			8
FRK212			1
FRK212-01			1
FRK213			2
FRK232			2
FRK233			1
FRK233-01			1
AYPC.W72.0911		Ax4+Bx2+B1x2-8x100	1
PE21x8		L3	1
FRK240		L7x2	1



**



03.02, *03.04

Заполнение 50 мм	
A=L1-152; B=H-H1-153 (A=L1-174; B=H-H1-164)**	1
A=L1-152; B1=H1-163 (A=L1-174; B1=H1-174)**	1