


Пример расчета двупольной двери открыванием наружу со штурлом

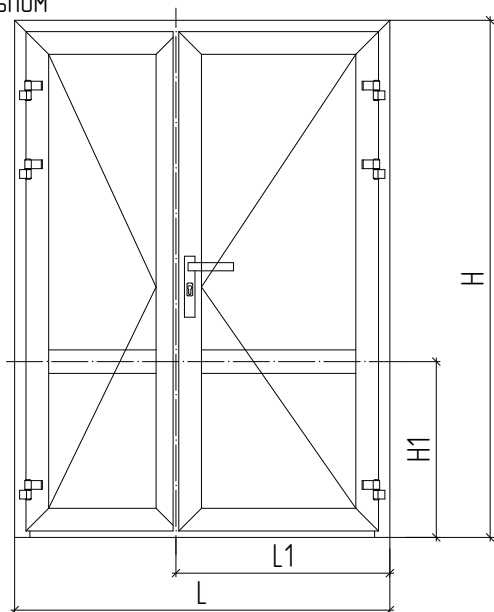


Артикул	Эскиз	1...
Комплекующие изделия		
AYPC.C48.0909		4
AYPC.W72.9908		16
100x56x1(3)		16 (16)
AYPC.C48.0919M-01K		8
AYPC.W62.0999K		2
AYPC.W62.0937		20
AYPC.W62.0912		8
5x10DIN6325D		40
AYPC.W62.0913		8
AYPC.W62.0957		8
AYPC.W62.0973K-01		4
AYPC.W62.0951K-01		4
AYPC.W62.0916-01		4
AYPC.W62.0909		2
AYPC.W72.0908K		1
AYPC.W72.0986		2
AYPC.W72.9904K		1
AYPC.W72.9906K		1
AYPC.C48.0906		2
AYPC.C48.0907		1
AYPC.F50.0932		H2/250
2,9x9,5-A2ISO14586		3
3,9x13-A2ISO14585		(L9+L10)/250
3,9x38-A2ISO14585		L13/250
4,2x16-A2ISO14585		4
4,2x19-A2ISO14585		H2/250
3,9x16-A2ISO14586		8+6
3,9x22-A2ISO14586		(L7+L8)/250

Артикул	Эскиз		1...
Профиль			
AYPC.W72.0104			L
			H
			H
AYPC.W72.0204 (AYPC.W72.0260)*			L2=L1-415
			H2=H-59
			L3=L1-635
AYPC.W72.0302			L4=L2-134 (L4=L2-156)*
			L5=L3-134 (L5=L3-156)*
AYPC.W72.0502			H3=H2-44
AYPC.W72.0801			L6=L-128
AYPC.C48.0618			L7=L2-76
			L8=L3-32
AYPC.C48.0611			L9=L2-3
			L10=L3-25
AYPC.C48.0602			L11=L4
			L12=L5
			H3=H-H1-179 (H3=H-H1-190)*
			H4=H1-138 (H4=H1-149)*
AYPC.W72.9907			L13=L-20

Артикул	Эскиз		1...
Уплотнители			
PB048.0750-FP		L7+L8+28x4	1
FRK198		(H2+H)x2	1
FRK211		(L2+L3+H2)x2+L	1
FRK194		(A+A1+B+B1)x4	1
FRK197		(A+A1+B+B1)x4	1
FRK179			16
FRK212			2
FRK212-01			2
FRK213			2
FRK233			1
FRK233-01			1
AYPC.W72.0911		(A+A1+B+B1)x4-16x100	1
FRK240		L13x2	1

**



03.02,*03.04

Заполнение 50 мм	
A=L1-152; B=H-H1-153 (A=L1-174; B=H-H1-164)*	1
A=L1-152; B1=H1-112 (A=L1-174; B1=H1-123)*	1
A1=L3-152; B=H-H1-153 (A1=L3-174; B=H-H1-164)*	1
A1=L3-152; B1=H1-112 (A1=L3-174; B1=H1-123)*	1