




Таблицы подбора количества накладных петель ALUTECH (2АН67/3АН67) по предельным значениям массы и размеров створки

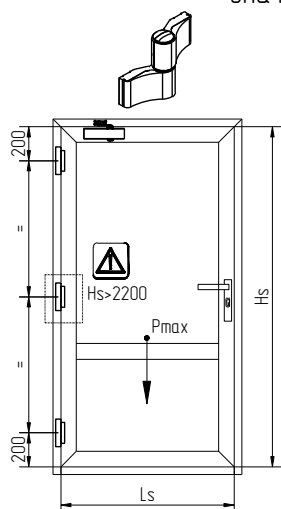


2500	127	125	116	107	99	92	85
2400	127	119	110	102	95	88	81
2300	121	113	105	97	90	83	77
2200	116	108	100	93	86	79	74
2100	111	103	95	88	82	76	70
2000	105	98	91	84	78	72	67
1900	99	93	86	79	73	69	64
Hs Ls	700	800	900	1000	1100	1200	1250

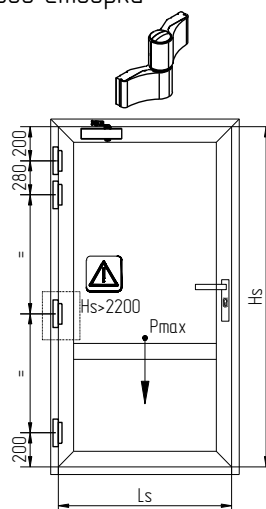

2500	159	159	154	143	132	123	113
2400	159	159	147	136	126	117	108
2300	159	151	140	130	120	111	103
2200	154	144	133	123	114	106	98
2100	147	137	127	118	109	101	93
2000	141	131	121	112	104	96	89
1900	135	125	115	107	99	91	85
Hs Ls	700	800	900	1000	1100	1200	1250

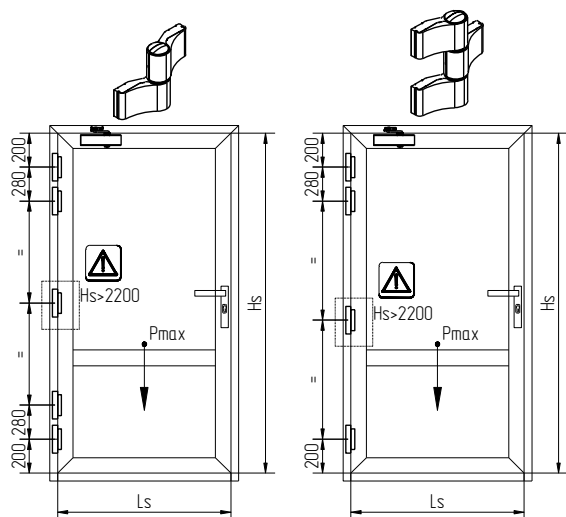

2500	200	200	200	185	171	159	147
2400	200	200	190	176	163	151	140
2300	200	196	181	168	155	144	133
2200	199	186	173	160	148	137	127
2100	192	178	164	152	141	131	121
2000	181	169	157	145	134	124	115
1900	170	160	149	138	127	118	109
Hs Ls	700	800	900	1000	1100	1200	1250

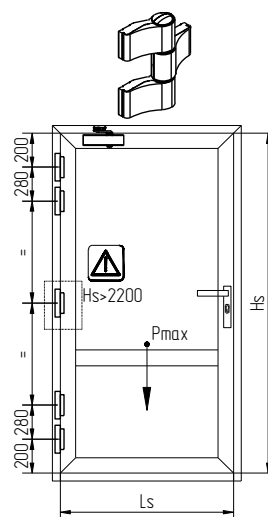

2500	200	200	200	200	200	200	190
2400	200	200	200	200	200	196	181
2300	200	200	200	200	200	187	173
2200	200	200	200	200	192	178	165
2100	200	200	200	197	183	169	157
2000	200	200	200	188	174	161	149
1900	200	200	191	179	165	153	141
Hs Ls	700	800	900	1000	1100	1200	1250



При высоте створки более 2200 мм необходимо установить дополнительную петлю согласно схеме.